



Hose Nozzles and Fittings From Dairy Spares Ltd

Dairy Spares Limited
Unit 1, Civic Industrial Park
Waymills, Whitchurch
Shropshire SY13 1TT

Telephone: 01948 667676
Facsimile: 01948 666505
email: sales@dairyspars.co.uk



ANKA® Hose Nozzles: Are strong, robust and provide outstanding impact resistance. They offer a quick action on/off movement, a fully adjustable spray pattern and very high flow rates to insure a fast wash-down time. Flow charts show 138ltr/min for the small and 312ltr/min for the large nozzles.

Features

- The outer ring protects the nozzle from high impact and excessive wear.
- Quick action on/off; for complete control.
- Fully adjustable; wide spray pattern to a full bore flow.
- Use of the ANKA® Male Coupling eliminates the need for sharp jubilee clip connections.
- Nozzles can be taken apart for servicing. Repair kits available.

Maximum Working Pressure : 7 bar (100psi) @ 20°c

Maintenance

Clean with hot soapy water. Lever off the cap using a small screwdriver, undo the stainless nut and bolt, untwist the barrel from the body, check the O-ring for wear, replace as necessary and lubricate with silicone grease before reassembly.

ANKA® Quick-Lock Couplings: Are put together and taken apart in one easy twist action. Using a constant size sealing ring the couplings are fully interchangeable allowing a wide range of configurations. Ease of hose extension, interchangeable nozzles, etc.

Features

- Quick and easy to use.
- One easy twisting motion.

Maximum Working Pressure :
10 bar (150psi) @ 20° C


Code	Description
WG 400	Anka© Hose Nozzle Blue Small 25-20mm
WG 401	Anka© Hose Nozzle Blue Small 25mm
WG 420A	Anka© Hose Nozzle Blue Small Repair Kit
WG 403	Anka© Hose Nozzle Blue Large 32mm
WG 404	Anka© Hose Nozzle Blue Large 40mm
WG 420B	Anka© Hose Nozzle Blue Large Repair Kit





Flexible Hose Fittings

Recommended for use with Yellow Tricoflex, Blue Tress Nobel and other flexible hose.

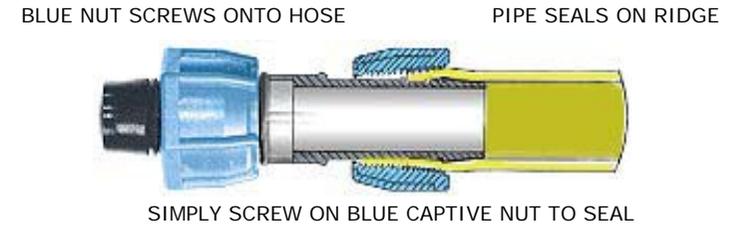

AN 015

Code

Description

- AN 010C Anka© Male Coupling 25mm
- AN 010D Anka© Male Coupling 32mm
- AN 010E Anka© Male Coupling 40mm
- AN 011D Anka© Reducing Male Coupling 25-20mm
- AN 001A Anka© Quick Lock Coupling Male 20mm
- AN 001B Anka© Quick Lock Coupling Male 25mm
- AN 001C Anka© Quick Lock Coupling Male 32mm
- AN 001D Anka© Quick Lock Coupling Male 40mm
- AN 002A Anka© Quick Lock Coupling Female 20mm
- AN 002B Anka© Quick Lock Coupling Female 25mm
- AN 002C Anka© Quick Lock Coupling Female 32mm
- AN 002D Anka© Quick Lock Coupling Female 40mm

Code

Description

- AN 012A Anka© Straight Coupling 15mm (1/2")
- AN 012B Anka© Straight Coupling 20mm (3/4")
- AN 012C Anka© Straight Coupling 25mm (1")
- AN 012D Anka© Straight Coupling 32mm (1 1/4")
- AN 014B Anka© Female Bend 20mm (3/4")
- AN 013A Anka© Tee 15mm (1/2")
- AN 013B Anka© Tee 20mm (3/4")
- AN 013C Anka© Tee 25mm (1")
- AN 015A Anka© Bracket Elbow 15mm (1/2")
- AN 016J Anka© Reducing Tee 50 x 40 x 50mm
- AN 016L Anka© Reducing Tee 50 x 32 x 50mm
- AN017D Anka© Female Connector 32mm (1 1/4")



AN 001

AN 002



AN 014

AN 010



AN 011



AN 017



AN 012



AN 013



AN 016

ANKA© fittings are manufactured from high grade Glass Fibre Reinforced Nylon these fittings are strong, resilient and lightweight.

With a BSPT thread these fittings have a maximum working pressure of 16 bar(230psi)

These fittings are not Water Board approved.